



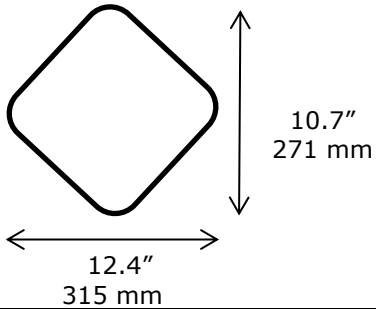
CX-30 Geocell

Applications:

EMBANKMENT | RESTORATION | SLOPES | GREEN ROOFS | CHANNELS | OVERPASSES |
ROADSIDE SHOULDER REINFORCEMENT | SWALES | PORTS & MARINAS

Note: This product may require tendons, J hooks, or earth anchors for proper installation. Please inquire about these accessories.

Cell Detail

<p>Cell Dimensions</p> 	<p>Manufactured Cell Depths</p> <p>4" 100 mm 6" 150 mm</p> <p>Weld Distance: 17"</p> <p>Expanded Unit Dimensions</p> <p>8' X 29' 2.4m X 8.7m</p>
--	--

Material Specifications

Properties	Test Method	Test Value
Material Composition	ASTM D1505	Polymer; VIRGIN HDPE Density: 0.9574 g/cm ³
Nominal Sheet Thickness	ASTM D5199	1.45 mm
Environmental Stress Crack Resistance	ASTM D1693	>6,000 Hrs.
Environmental Stress Crack Resistance	ASTM D5397	>400 Hrs.
Stabilizer	ASTM D297-13	1.55% carbon black
Short Term Seam Peel Strength		4" (100 mm) 1542N 6" (150 mm) 2170N
Long Term Seam Peel Strength	A 100 mm (4 inch) wide section sample shall support a (160 lb.) load for a period of 7 days (168 hrs.) minimum in a temperature controlled environment undergoing a temperature change on a 1 hour cycle from ambient room temperature to (130° F)	

Product Description

Item Code	Cell Depth	Expanded Unit Dimensions	Area / Unit	Pallet Qty
CX30-4	4" (100 mm)	8' x 29' (2.4 m x 8.7 m)	232 SF	18
CX30-6	6" (150 mm)	8' x 29' (2.4 m x 8.7 m)	232 SF	12

01/01/22

Made in the USA

Carthage Mills assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. Carthage Mills disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.